


# Cypress

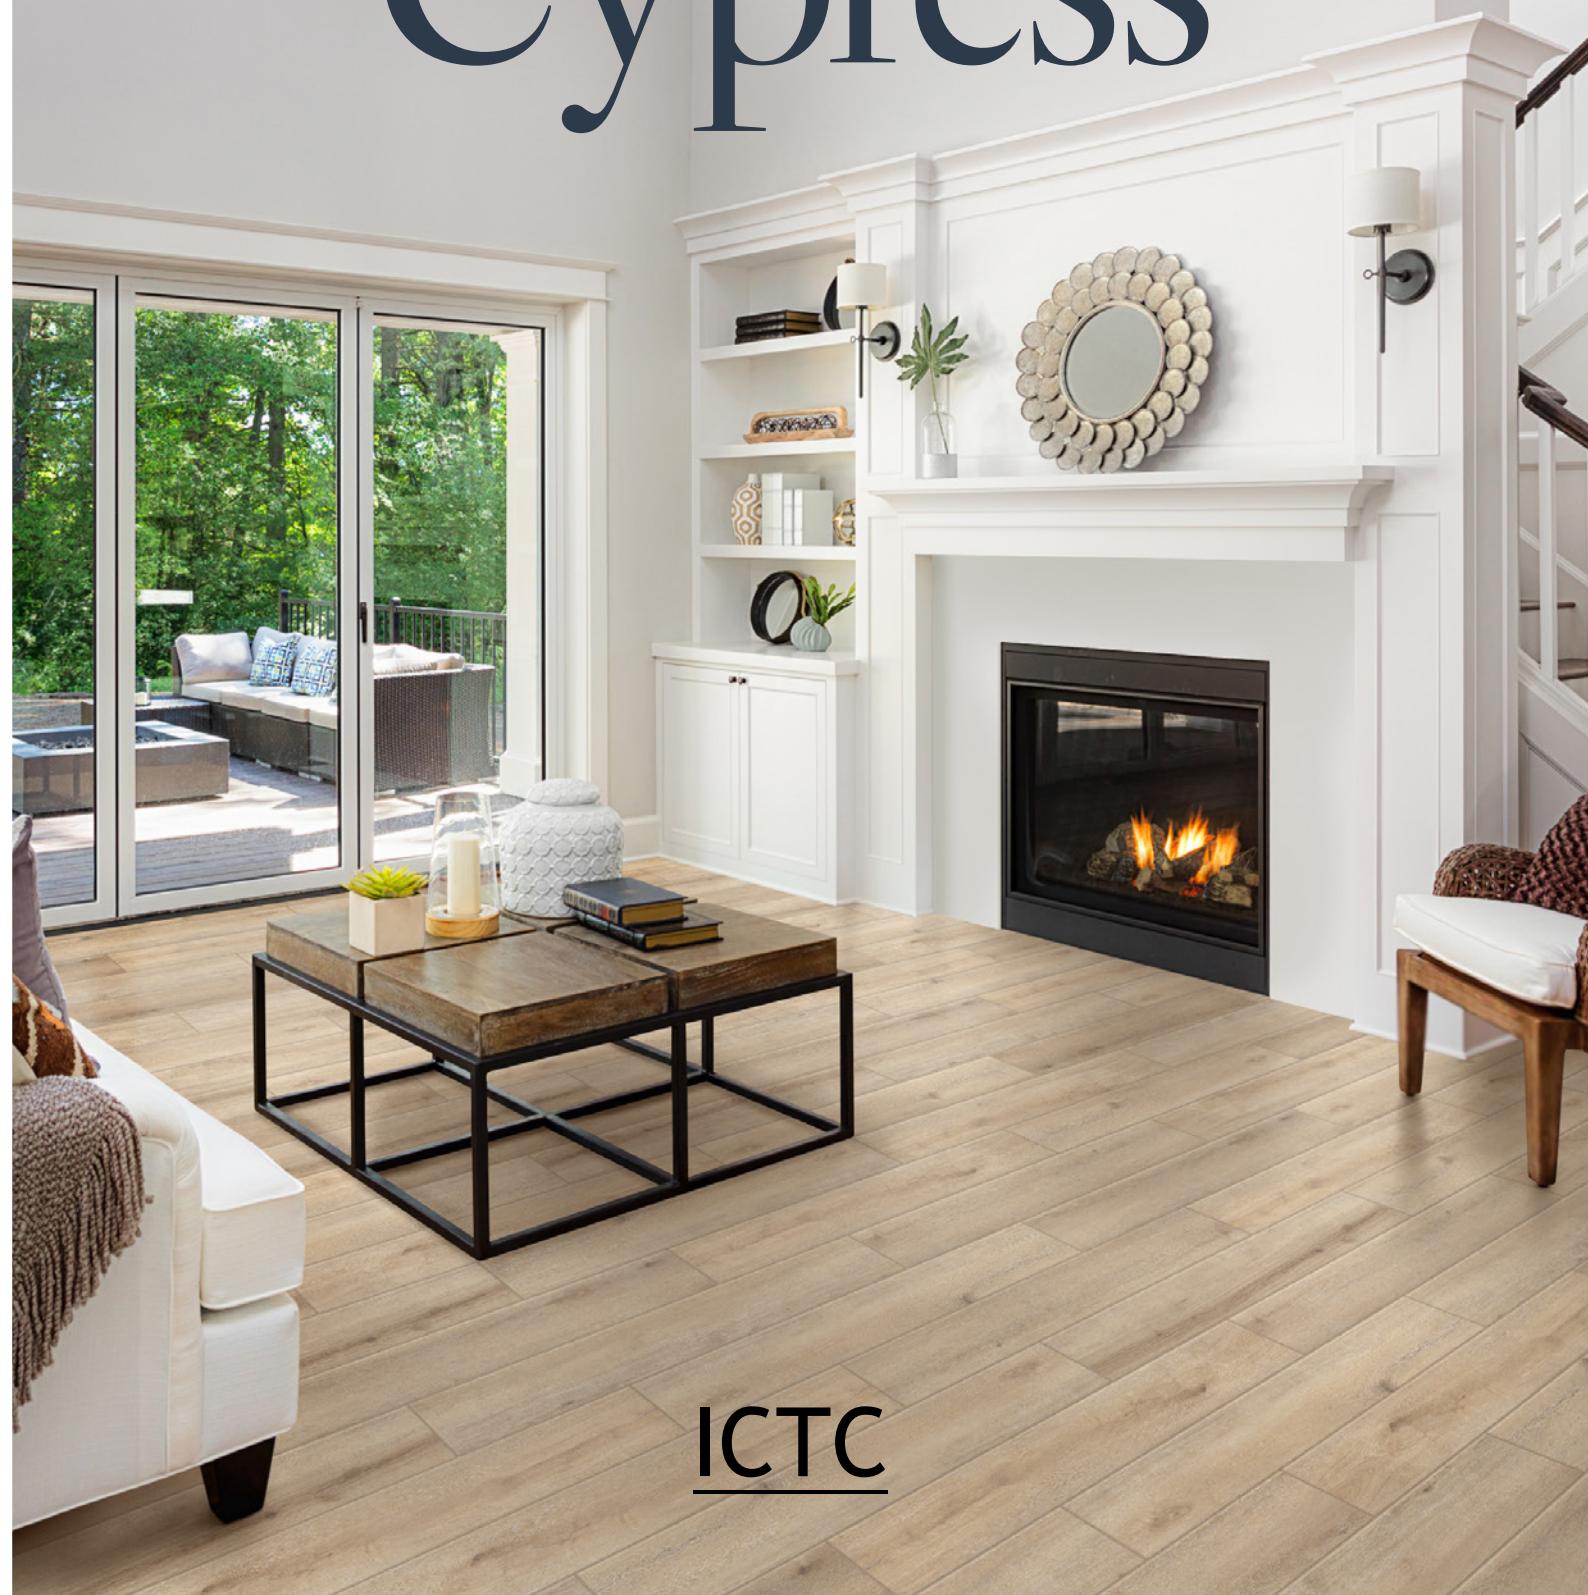

ICTC

# Cypress

## Colors & Sizes

### Grey



8" x 48"  
1106512 Matte

### Blonde



8" x 48"  
1106513 Matte

### Natural



8" x 48"  
1106511 Matte

### Brown



8" x 48"  
1106514 Matte

Colors shown may vary from actual product.

Final selection should be made from actual product samples.

Sizes listed are nominal.



Cypress Grey 8" x 48" Matte



Cypress Blonde 8" x 48" Matte



Cypress Natural 8" x 48" Matte



Cypress Brown 8" x 48" Matte



Cypress Natural 8" x 48" Matte

## Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1 & A137.3.

SPECS	TEST METHOD	INDUSTRY STANDARD	OUR VALUES	
WATER ABSORPTION	ASTM C373	≤0.5%	≤0.5%	
SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL	
CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. Sample must show no visible defects.	NOT AFFECTED	
D.C.O.F. AcuTest®	ANSI A326.3	INDOOR ≥0.42 WET OUTDOOR >0.55 WET	≥0.42 WET >0.55 WET 2CM & GRIP	
STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED	
BREAKING STRENGTH GAUGED PORCELAIN	ASTM C1505	≥175 lbf	≥200 lbf	
BREAKING STRENGTH	ASTM C648	≥275 lbf	≥300 lbf	
BREAKING STRENGTH OUTDOOR 2CM	ASTM 1505	2000 lbf (10.9 kN)	≥2500 lbf	
RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT	
WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40%	Rectified
WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40%	Rectified
WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25%	Rectified
WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50%	Calibrated
THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in	
LENGTH / WIDTH VARIATION	ASTM C499	±0.25% or ±0.03 in (±0.8 mm)	±0.25%	

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.

### Routine Care Instructions:





**MADE IN USA**