

Pietra di Lucca




CLASSIC
TILE


made in usa

Pietra di Lucca


Colors & Sizes

Ivory







24" x 48" Rectified
1106345 Matte
1106349 Chiseled
1106353 Grip




32" x 32" Rectified
1106357 Matte



12" x 24" Pressed
1106340 Matte





12" x 12" Mosaic
(36 DOT 2"x2")
1106361 Matte




3" x 12" Bullnose
1106365 Matte

Sand







24" x 48" Rectified
1106346 Matte
1106350 Chiseled
1106354 Grip




32" x 32" Rectified
1106358 Matte



12" x 24" Pressed
1106341 Matte





12" x 12" Mosaic
(36 DOT 2"x2")
1106362 Matte




3" x 12" Bullnose
1106366 Matte

Greige







24" x 48" Rectified
1106348 Matte
1106352 Chiseled
1106356 Grip




32" x 32" Rectified
1106360 Matte



12" x 24" Pressed
1106343 Matte





12" x 12" Mosaic
(36 DOT 2"x2")
1106364 Matte




3" x 12" Bullnose
1106368 Matte

Honey







24" x 48" Rectified
1106347 Matte
1106351 Chiseled
1106355 Grip




32" x 32" Rectified
1106359 Matte



12" x 24" Pressed
1106342 Matte



12" x 12" Mosaic
(36 DOT 2"x2")
1106363 Matte



3" x 12" Bullnose
1106367 Matte



Pietra di Lucca Ivory 32" x 32" Matte

Colors shown may vary from actual product.
Final selection should be made from actual product samples.
Sizes listed are nominal.



Wall: Pietra di Lucca Greige 24" x 48" Chiseled
Inset Shelf: Pietra di Lucca Greige 12" x 12" Mosaic Matte
Floor: Pietra di Lucca Greige 12" x 24" Matte



Pietra di Lucca Sand 12" x 24" + 12" x 12" Mosaic Matte



Pietra di Lucca Honey 12" x 24" Matte



Wall: Pietra di Lucca Ivory 24" x 48" Chiseled
Floor: Pietra di Lucca Greige 32" x 32" Matte





Pietra di Lucca Ivory 12" x 24" Matte


















*Backsplash: Pietra di Lucca Honey 12" x 12" Mosaic Matte
Floor: Pietra di Lucca Honey 32" x 32" Matte*



Pietra di Lucca Sand 24" x 48" Grip

Technical Specifications


This product meets or exceeds all standards described in ANSI A137.1 & A137.3.

	SPECS	TEST METHOD	INDUSTRY STANDARD	OUR VALUES	
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.5%	
	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL	
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. Sample must show no visible defects.	NOT AFFECTED	
	D.C.O.F. AcuTest®	ANSI A326.3	INDOOR ≥0.42 WET	≥0.42 WET	
			OUTDOOR >0.55 WET	>0.55 WET 2CM & GRIP	
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recordedpost cleaning.	NOT AFFECTED	
	BREAKING STRENGTH GAUGED PORCELAIN	ASTM C1505	≥175 lbf	≥200 lbf	
	BREAKING STRENGTH	ASTM C648	≥275 lbf	≥300 lbf	
	BREAKING STRENGTH OUTDOOR 2CM	ASTM 1505	2000 lbf (10.9 kN)	≥2500 lbf	
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes offreezing and thawing. Sample must show no visible defects.	RESISTANT	
	WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40%	Rectified
	WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40%	Rectified
	WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25%	Rectified
	WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50%	Calibrated
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in	
	LENGTH / WIDTH VARIATION	ASTM C499	±0.25% or ±0.03 in (±0.8 mm)	±0.25%	

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.

Routine Care Instructions:



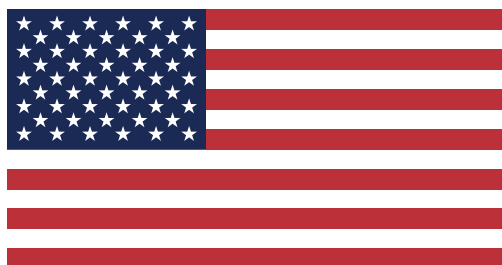

MADE IN USA